



## Early Journal Content on JSTOR, Free to Anyone in the World

This article is one of nearly 500,000 scholarly works digitized and made freely available to everyone in the world by JSTOR.

Known as the Early Journal Content, this set of works include research articles, news, letters, and other writings published in more than 200 of the oldest leading academic journals. The works date from the mid-seventeenth to the early twentieth centuries.

We encourage people to read and share the Early Journal Content openly and to tell others that this resource exists. People may post this content online or redistribute in any way for non-commercial purposes.

Read more about Early Journal Content at <http://about.jstor.org/participate-jstor/individuals/early-journal-content>.

JSTOR is a digital library of academic journals, books, and primary source objects. JSTOR helps people discover, use, and build upon a wide range of content through a powerful research and teaching platform, and preserves this content for future generations. JSTOR is part of ITHAKA, a not-for-profit organization that also includes Ithaka S+R and Portico. For more information about JSTOR, please contact [support@jstor.org](mailto:support@jstor.org).

# SCIENCE

[Entered at the Post-Office of New York, N.Y., as Second-Class Matter.]

A WEEKLY NEWSPAPER OF ALL THE ARTS AND SCIENCES.

SEVENTH YEAR.  
VOL. XIV. NO. 337.

NEW YORK, JULY 19, 1889.

SINGLE COPIES, TEN CENTS.  
\$3.50 PER YEAR, IN ADVANCE.

## THE SPRAGUE ELECTRIC-RAILWAY MOTOR.

WE publish in this issue views of the Sprague improved electric motor for street-railway work. This motor represents the experience of several years in the electric street-railway business, and it is intended to meet all the exigencies in this kind of work. In its manufacture, every detail of mechanical and electrical construction is carefully attended to, and the most recent improvements which experience could suggest have been adopted to meet the necessities of street-car service.

Only one intermediate shaft is used between the armature pinion and the main gear, and the entire reduction is about 12 to 1. All

The armatures are of the type which has been proved to be water-proof, and incapable of injury by moisture. In a recent test upon one of these armatures, made at the Sprague factory at Schenectady, and described in this paper a short time ago, one of these armatures was placed successively in a tub of fresh water and allowed to remain there for twenty-four hours, and in a tub of salt water and allowed to remain there for the same time. After each of these baths, the armature was placed in position in the motor, and the machine was worked to one-third above its normal load, as measured by a dynamometer, for several hours without developing any trouble whatever. These tests proved most conclusively that these machines can be relied upon under all condi

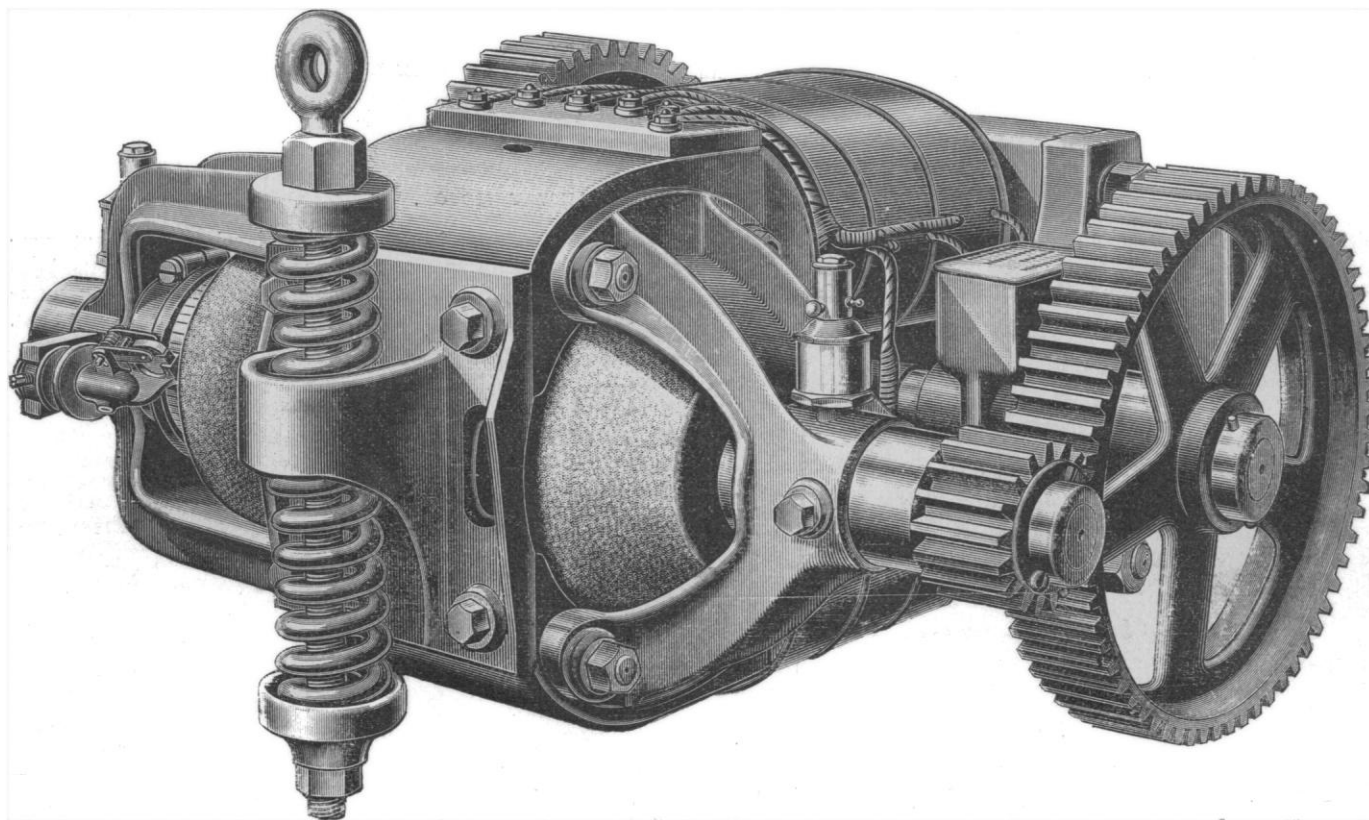


FIG. 1. — NEW SPRAGUE ELECTRIC-RAILWAY MOTOR.

the gears and every part of the motor are made extremely strong and durable, as can be seen in the case of the gears in the engraving, where the general appearance of durability and strength is everywhere marked.

The main gears are of the split-gear pattern, so that in case of necessity they can be easily removed from the shaft without dismounting the machine. The pinion and all the bearings are also constructed so that they can be easily removed if necessary.

Great attention has been paid in this motor to obtain a machine which will require a minimum amount of care, under the unfavorable conditions which motors for street-railway work very often meet in actual practice. For this reason, all the bearings are made completely dust-proof and very durable.

tions of weather, and that they cannot be harmed by moisture or by water splashing upon them from the road-bed.

Another important improvement which has been adopted in this machine is that the field-magnet coils are completely incased in covers, as shown in the engravings, which fully protect the wire from all outside damage. These casings are hermetically closed, so that it is impossible for moisture to affect the coils in any way.

The style of brushes used upon these motors is of a new type, which has been shown to give excellent results in this kind of work.

The Sprague method of flexibly suspending the motors, and of controlling the speed of the motor without the use of any wasteful resistances, is also in use with these motors upon all the roads installed by the Sprague Electric Railway and Motor Company.

A great deal of attention has been paid in the design of this motor, while great care has been taken in regard to durability and strength, to reducing the weight to a minimum. For this purpose, and with this object in view, cast iron has been dispensed

#### GIRDLING TREES TO IMPROVE FRUITFULNESS.

IN many sections where the soil is moist and rich, fruit-trees grow largely to wood and foliage, and fail to produce fruit until they reach considerable age and size. To discover some means of

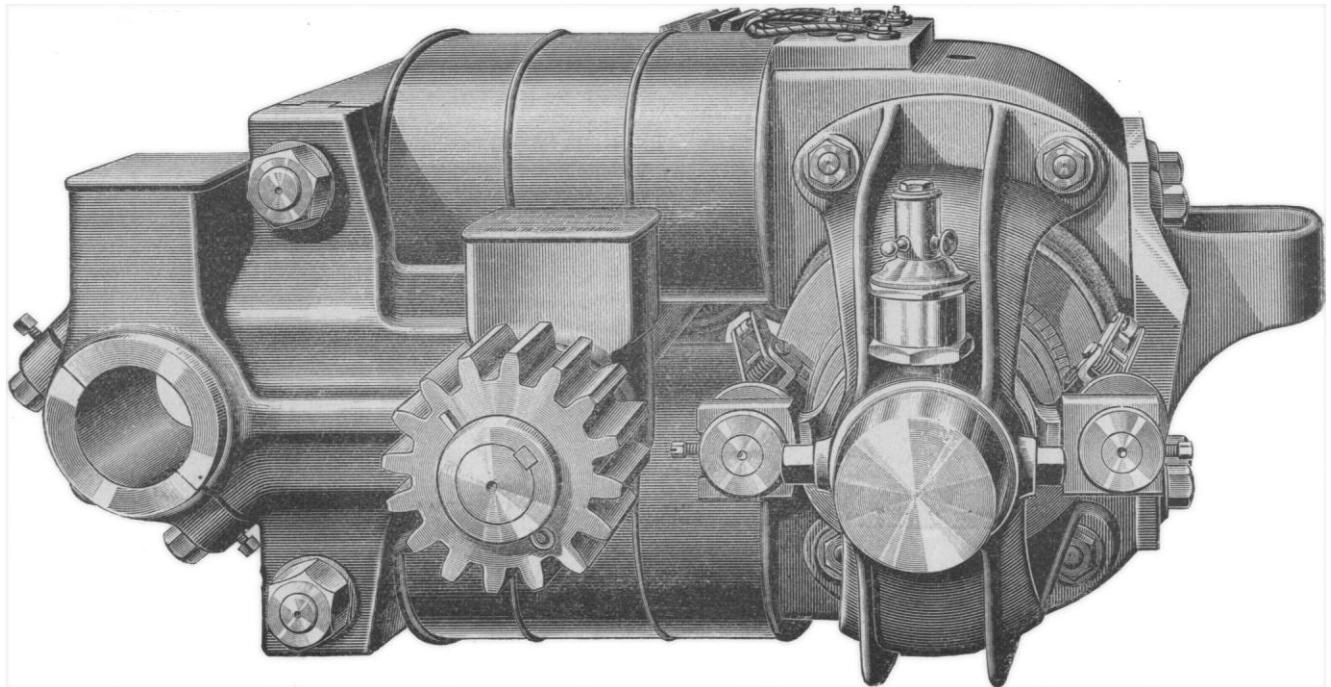


FIG. 2.—NEW SPRAGUE ELECTRIC-RAILWAY MOTOR.

with in the cores and yoke of the field-magnets, and wrought iron substituted.

These motors are already in operation at Wichita (Kan.), Marlborough (Mass.), Cleveland (O.), Cincinnati (O.), Erie (Penn.), At-

lantic City (N.J.), and at one or two other places where they have been installed. They have been shown to give very good results, and in the future this type of motor will be used in all of the Sprague electric-railway installations.

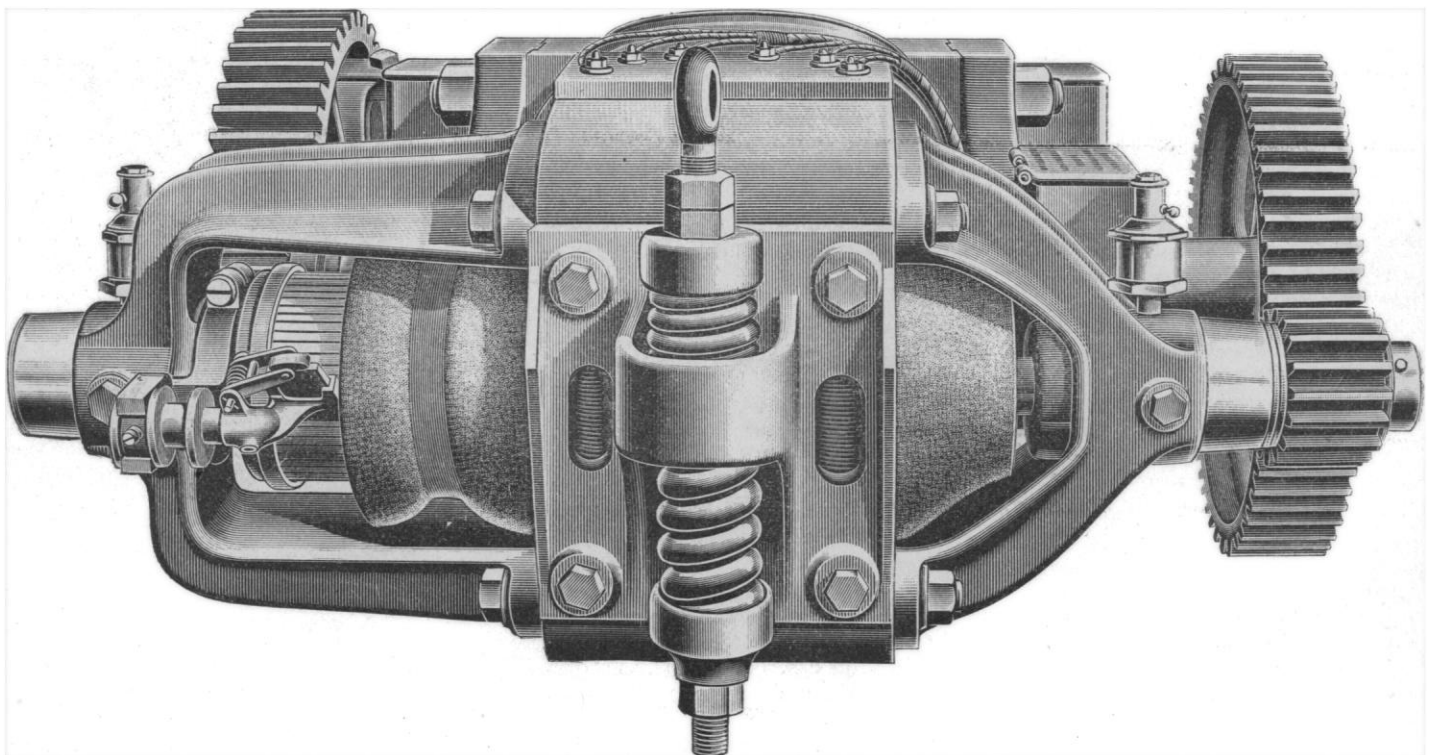


FIG. 3.—NEW SPRAGUE ELECTRIC-RAILWAY MOTOR.

lantic City (N.J.), and at one or two other places where they have been installed. They have been shown to give very good results, and in the future this type of motor will be used in all of the Sprague electric-railway installations.

Three trees were girdled by cutting out a ring of bark  $\frac{1}{4}$ ,  $\frac{1}{2}$ , and  $\frac{3}{4}$  inch wide at the ground, July 12, 21, and 29; 2d, Three trees were girdled just below the main branches with the three widths of girdle as in 1st, July 12, 21, and 29; 3d, The same as above was